


KSCARDIO412P

Compact high-performance passive cardioid subwoofer



subwoofer



Description

The Thunder-KSCARDIO412P joins the Thunder family as a state-of-the-art cardioid subwoofer, delivering extremely powerful low-frequency output while significantly reducing rear sound radiation. Designed for professional live sound and fixed installations, it ensures clean, focused bass with controlled back emissions.

Powered by four 12-inch neodymium woofers, it achieves a maximum SPL of 138 dB with continuous power handling up to 2500 W. Its cardioid design offers up to 12 dB of rear attenuation in Mono-Amp mode and up to 20 dB in Bi-Amp mode, without requiring complex external processing.

Housed in a robust birch plywood cabinet with a slim footprint, the Thunder-KSCARDIO412P combines high SPL performance with efficient space usage. 2x SpeakOn NL4 connectors and selectable mono/bi-amp impedance ensure flexible integration and controlled bass.

Features

- Type: Passive cardioid subwoofer
- Transducers: 4× 12" neodymium magnet woofers
- Frequency Response: 35 Hz – 150 Hz (–6 dB)
- Coverage: Cardioid
- Max SPL: 138 dB
- Configuration:
 - Mono amp: rear attenuation up to –12 dB
 - Bi-amp: rear attenuation up to –20 dB
- Connectors: 2x SpeakOn NL4
- Nominal Impedance:
 - Mono amp: 4 Ω (2500W rated power)
 - Bi-amp: 4 Ω + 16 Ω (2100 W + 700W)

Applications

Clubs, Beach Bars, Rooftops, DJ Clubs, Theaters, Live events, Broadcast, Fixed installations.

Colors Available

- Black
- White
- RAL




KSCARDIO412P

Compact high-performance passive cardioid subwoofer



subwoofer

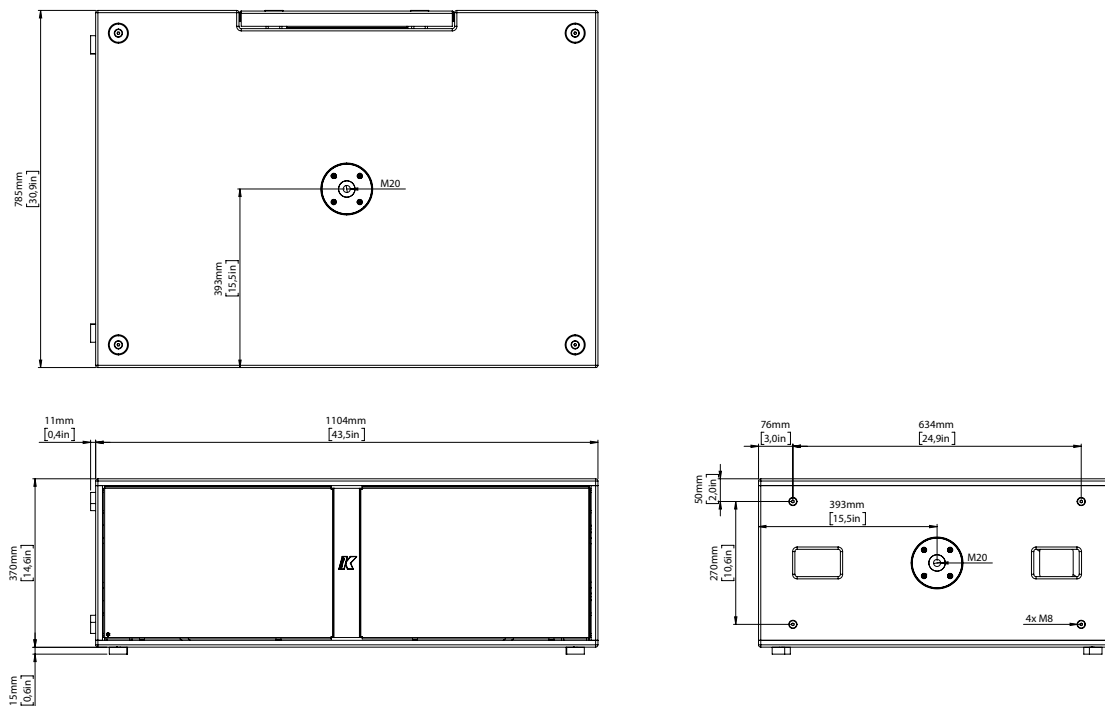

Technical Specifications

Type	Passive cardioid subwoofer
Transducers	4x 12" neodymium magnet woofers (3x front, 1x rear)
Frequency Response ¹	35 Hz - 150 Hz (-6 dB)
Crossover Network ²	Internal ²¹ , bypassed ²²
Max SPL ³	138 dB (peak)
Coverage ⁴	Cardioid
Rated Power	2500W Mono-amp 2100W + 700W Bi amp
Nominal Impedance	4 Ω Mono-amp (CH2 front+rear 2+2-) 4Ω + 16Ω Bi amp (CH1=rear1+1-, CH2=front 2+2-)
Connectors	2xSpeakOn NL4 2+2- / 1+1- (signal); 2+2- / 1+1- (link)

Handling & Finishes

Material	Polyurea coated birch plywood
Color	Black
IP Rating	IP54
Dimensions ⁵ _(WxHxD)	1104 x 370 x 785 mm (43.46 x 14.56 x 30.90 in)
Weight	62,4 kg (137,58 lbs)

1. With dedicated preset.
 2.1. Mono-amp: internal crossover and filters enabled, managed by a dedicated preset.
 2.2 Bi-amp, internal crossover bypassed by switch, processing via external DSP
 3. Maximum SPL is calculated using a signal with crest factor 4 (12dB) measured at 8 m then scaled at 1 m.
 4. Mono-Amp mode: rear attenuation -12 dB (typ). Bi-Amp mode: rear attenuation up to -20 dB (max.)
 5. Vibration-dumping feet 0,15mm (0,16in)

All product components are designed and custom-made by K-array's R&D department, adhering to the company's stringent quality control standards.

