



Step 1: Download the the Firmware

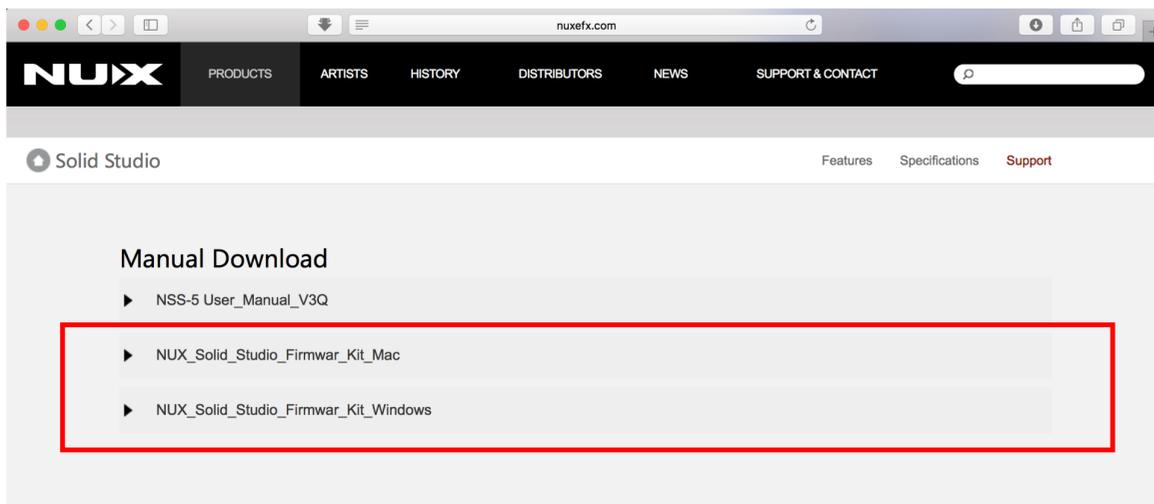

Download the the Firmware Update kit from the website using a PC or Mac

Step 2: Connect To Computer

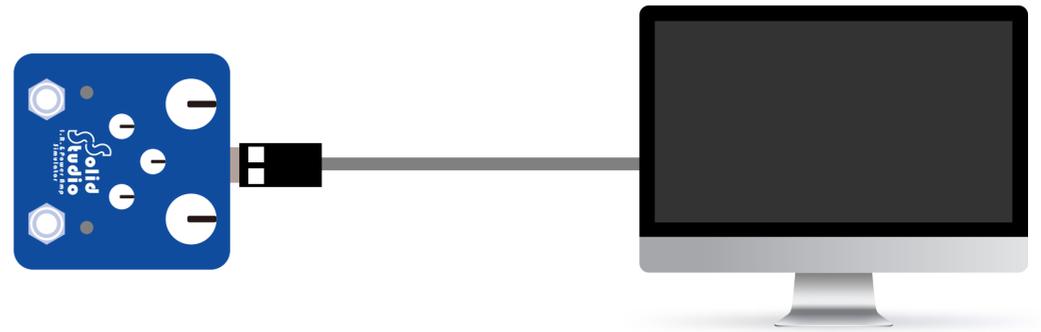


A. Connect your NUX Solid Studio to your Mac or PC computer using a Micro-USB cable

Step 3: Get ready for the update




A. Run "NUX DFU Updater"

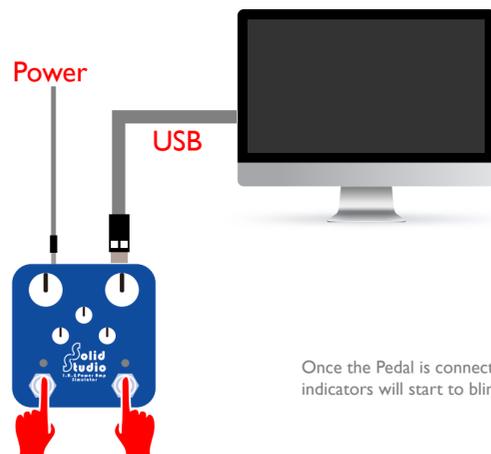


B. Keep holding down both foot-switches and plug in your power supply (9V DC Negative Center), release both foot-switches until you see the pedal is connected.

Once the Pedal is connected both LED indicators will start to blink..


Step 4: Start updating

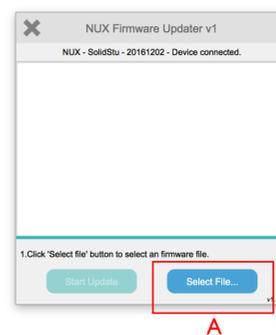

A. Select the new firmware .bin file

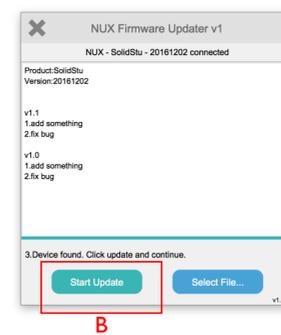


B. Click "Start update" button

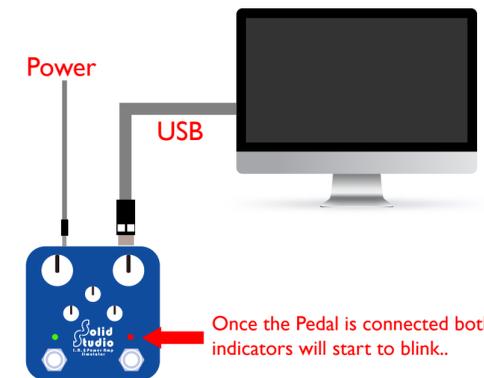

Once the Pedal is connected both LED indicators will start to blink..


Step 5: Wait until the progress ends

Warning: DO NOT UNPLUG The Micro-USB Cable nor the POWER SUPPLY !

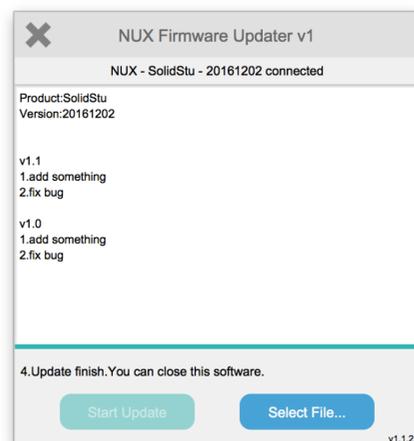

During updating process, both LED indicators will keep flashing and once the progress is done both LED indicators will stay on.

Step 6: Finish updating

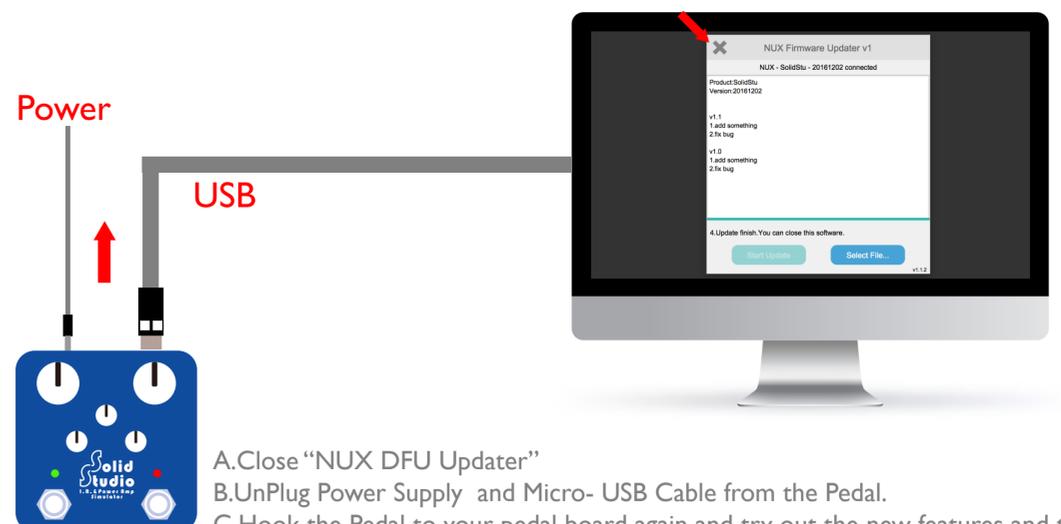

A. Close "NUX DFU Updater"

B. Unplug Power Supply and Micro-USB Cable from the Pedal.

C. Hook the Pedal to your pedal board again and try out the new features and tones.